

# 2 Multimedia Programming with Python and SDL

2.1 Introduction to Python



2.2 SDL/Pygame: Multimedia/Game Frameworks for Python

Literature:

G. van Rossum and F. L. Drake, Jr., An Introduction to Python -  
The Python Tutorial (version 2.5), Network Theory 2006  
<http://www.network-theory.co.uk/docs/pytut/>



- Guido van Rossum, 1991, CWI Amsterdam
- Now open source, current main versions:
  - 2.7.6 (used here) and 3.4.0
- Targeted at programming novices
- Characteristics:
  - Interpreted scripting language
  - Compiled to intermediate byte code (similar to Java)
  - Multi-paradigm language:  
imperative/structured, object-oriented, functional, aspect-oriented
  - Dynamic typing
  - Automatic garbage collection
- Do you really understand all these terms?

QUIZ:

How is the foot related to Python?



Images: Wikipedia

# Java to Python: Imperative Example (Java)

```
public class Main {  
  
    public static int sequentialSearch(int q, int[] a) {  
        for(int i = 0; i < a.length; i++) {  
            if(a[i]==q) {  
                return i;  
            }  
        }  
        return -1;  
    }  
  
    public static void main(String[] args) {  
  
        int[] a = {11, 22, 33, 44, 55, 66};  
        System.out.println("Array a: "+a);  
        System.out.println("Search for 55: "+sequentialSearch(55,a));  
        System.out.println("Search for 23: "+sequentialSearch(23,a));  
  
    }  
  
}
```

# Java to Python: Imperative Example

```
def sequentialSearch (q, a):  
    for i in range(0,len(a)):  
        if a[i]==q:  
            return i  
    return -1
```

```
a = [11, 22, 33, 44, 55, 66]  
print "Array a: ", a  
print "Search for 55: ", sequentialSearch(55, a)  
print "Search for 23: ", sequentialSearch(23, a)
```

**QUIZ:**  
What are the differences to Java?

# First Observations on Python



- Very compact code
- Data types are not specified
- Powerful but simple built-in list datatype
  
- Indentation (white space) is important for program semantics !!!
  - Block levels given by indentation
  - What is done in Java with {} brackets, is done here with indentation
- Example: A different (wrong!) algorithm:

```
def sequentialSearch (q, a):  
    for i in range(0, len(a)):  
        if a[i]==q:  
            return i  
    return -1
```

# Scripting Language

- Traditionally:  
*A scripting language* is a programming language that is used to control some application software
  - Command languages for operating systems
  - Task automatization in user interfaces
  - Scripts for Web browsers, word processors, spreadsheet software, ...
- Historically, considered slow in execution and limited in program size
- Modern general-purpose scripting languages
  - Have inherited many features from traditional scripting languages
  - Are considered as full application programming languages:
  - Examples: REXX, Perl, **Python**, Ruby

# Compilation, Interpretation and Others

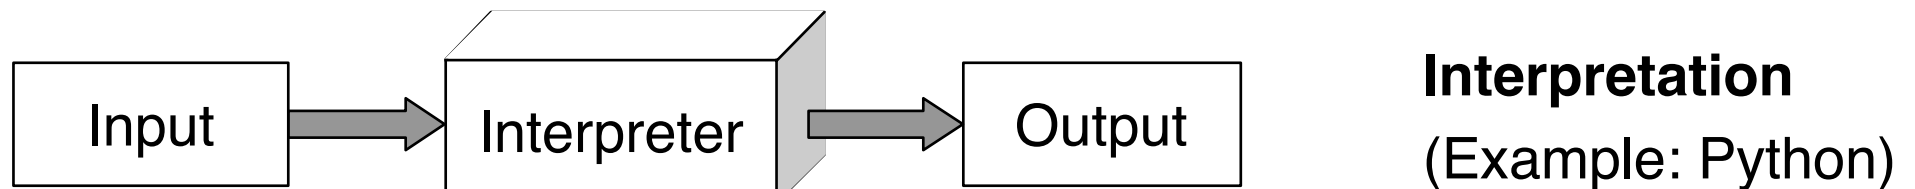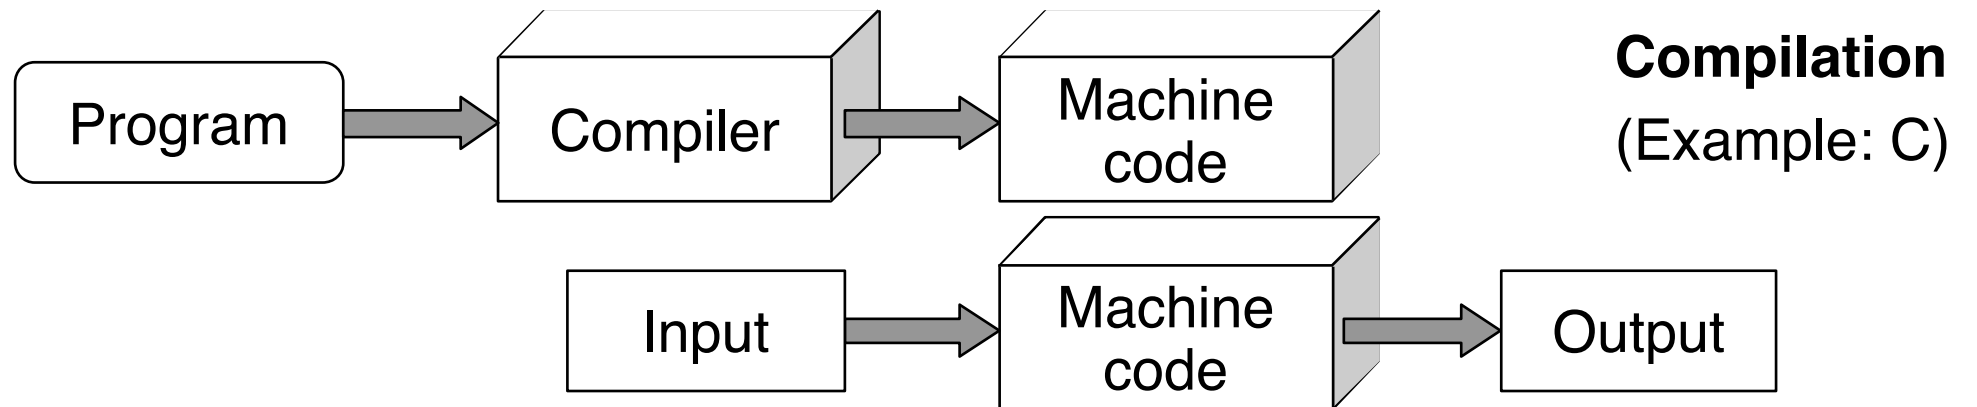


Variations:

- Compilation to intermediate code (Java)
- Just-in-time compilation
- Internal compilation to intermediate code in interpreter (Python/ CPython)

# Interactive Interpreter

- Interpreted languages can easily be executed line-by-line
- Interactive execution is helpful for understanding
  - See BASIC, Logo etc.

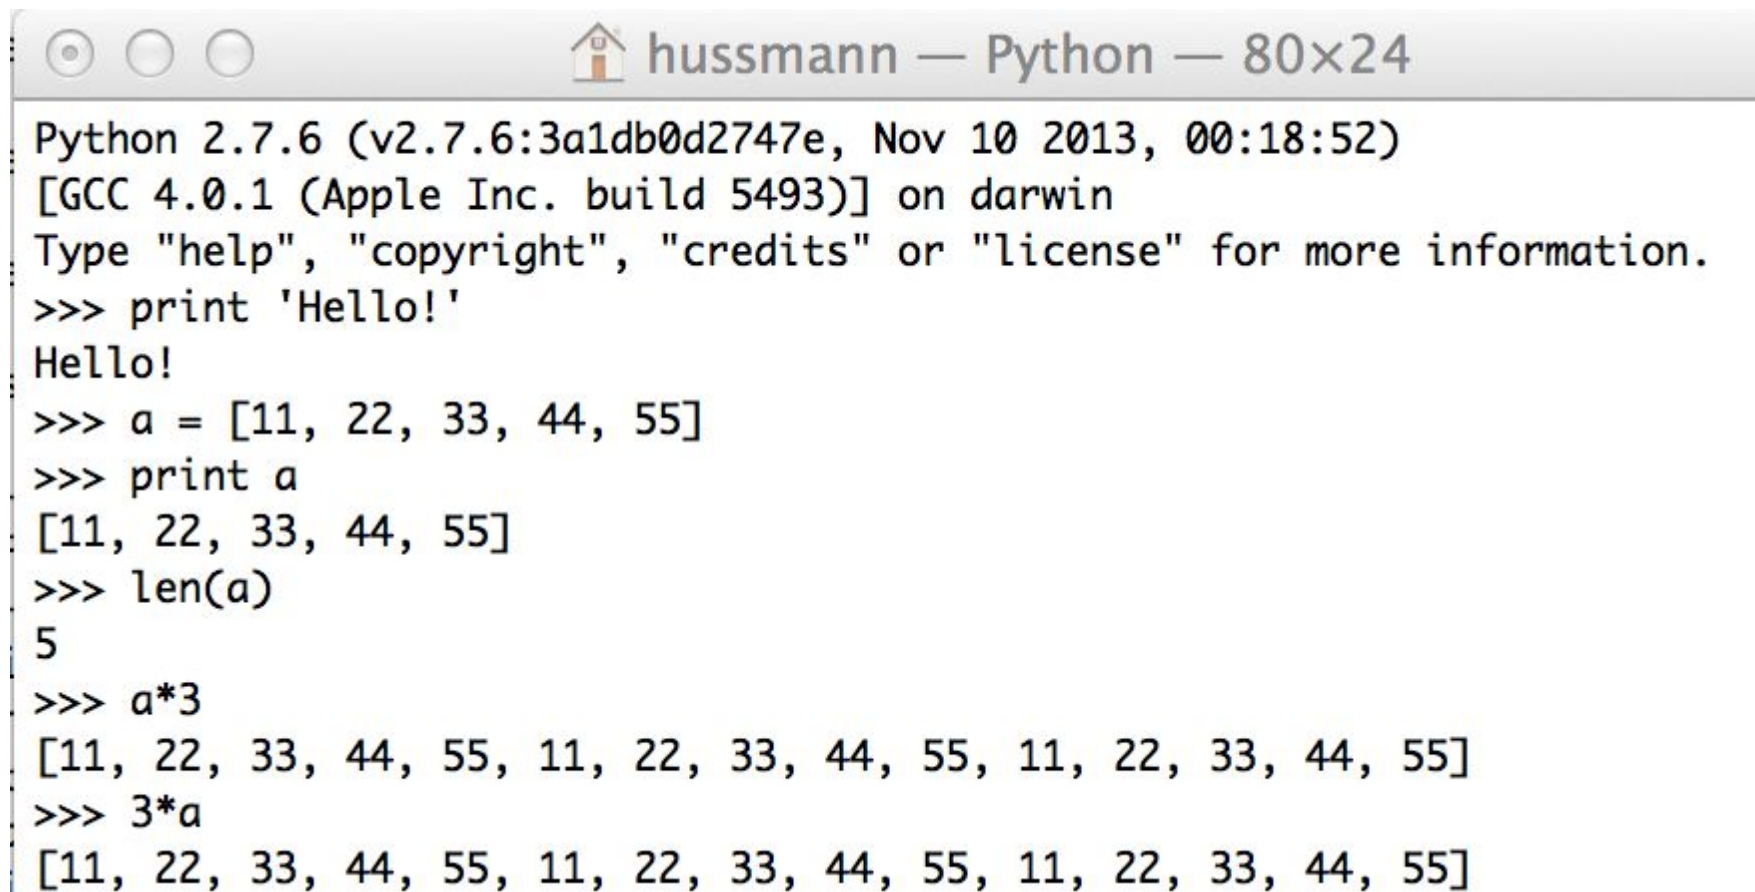

```
Python 2.7.6 (v2.7.6:3a1db0d2747e, Nov 10 2013, 00:18:52)
[GCC 4.0.1 (Apple Inc. build 5493)] on darwin
Type "help", "copyright", "credits" or "license" for more information.
>>> print 'Hello!'
Hello!
>>> a = [11, 22, 33, 44, 55]
>>> print a
[11, 22, 33, 44, 55]
>>> len(a)
5
>>> a*3
[11, 22, 33, 44, 55, 11, 22, 33, 44, 55, 11, 22, 33, 44, 55]
>>> 3*a
[11, 22, 33, 44, 55, 11, 22, 33, 44, 55, 11, 22, 33, 44, 55]
```



# Static and Dynamic Typing

- Type checking:
  - Simple, automatically executable form of proof for program correctness (in certain limited respects)
  - Avoids operations to be applied to unsuitable arguments
- **Static** typing:
  - Type information is checked **before execution** of program (at compile time)
  - Program code has to specify (explicitly or implicitly) types for all variables
  - Examples: Java, Pascal, C, Standard ML
- **Dynamic** typing:
  - Type information is checked **during execution** of program (at run time)
  - Type information for variables only exists after value assignment
  - Examples: Smalltalk, Python, JavaScript
- In practice, static and dynamic typing are sometimes mixed:
  - See the dynamic type check for *downcast* operations in Java!

# Strong and Weak Typing

- Surprisingly ill-defined terms!
  - Do not take this classification too serious!
- **Strong** typing:
  - Basic idea: “Strong” typing provides no (or only very limited) possibility to evade the restrictions of the type system
  - Examples of strongly typed languages:  
Java, Pascal, Standard ML, **Python**
- **Weak** typing:
  - Implicit type conversions
  - Type conversions with undefined result
  - Examples of weakly typed languages:  
Visual Basic, C, JavaScript

# Duck

“When I see a bird that walks like a duck and swims like a duck and quacks like a duck, I call that bird a duck.”  
James Whitcomb Riley



- The type of an object is determined only by the fact whether it has the features required from it.
- Appropriate for object-oriented programming languages with dynamic types - like Python.

# String Operations in Python

Operations valid for all sequence types:

- Indexing: `str[5]` (*str* is the string object)
- Negative indexing: `str[-5]` (counting from the end)
- Slicing: `str[2:5]`, `str[:5]`, `str[2:6:2]`, `str[::-1]`
  - Omitted index is begin or end, third value is step size (covers reversion)
- Operations:  
`len(str)`, `min(str)`, `max(str)`, `x in str`

Numerous methods specific for strings like:

- `capitalize()`
- `count(substr)`
- `find(substr)`
- `isalpha()`
- `partition(sep)`
- `replace`
- `split(sep)`
- `upper()`
- `title()`

# Lists in Python

- List: Sequential collection of objects (of arbitrary, also varying type)
- Can be easily used as stack or queue data structures
- Flexible creation of lists e.g. by *list comprehension*:  
`l = [3*x for x in range(1,4)]`
- Lists are mutable (can be even changed through slices)
- List methods:
  - `append`
  - `count`
  - `extend`
  - `index`
  - `insert`
  - `pop`
  - `remove`
  - `reverse`
  - `sort`

# Sets in Python

- Set: Unordered collection without duplicates
- Constructor
  - `set` builds a set from a list
- Basic mathematical operations for sets:
  - Union (`|`)
  - Intersection (`&`)
  - Difference (`-`)
  - Symmetric difference (`^`)
- Example:  
`set('multimedia') & set('programming')`

# Java to Python: Imperative Example

```
def sequentialSearch (q, a):  
    return q in a
```

```
a = [11, 22, 33, 44, 55, 66]
```

```
print a
```

```
print "Array a: ", a
```

```
print "Search for 55: ", sequentialSearch(55, a)
```

```
print "Search for 23: ", sequentialSearch(23, a)
```

# Tuples and Dictionaries in Python

- Tuple: immutable collection of objects (of arbitrary type)  
`N = ('max', 'muster')`  
`N = 'max', 'muster'`  
Strange: One-element tuple written as `'max',`
- Easy unpacking of tuples:  
`vorname, nachname = ('max', 'muster')`
- Dictionary: Mutable collection of object maps (of arbitrary type)  
`age = {'anna':23, 'max':22}`
  - Key entries can only be of immutable type (strings, numbers, tuples)
  - Key entries must be *hashable*
  - Main purpose: indexed access `age['anna']`
- Constructor accepts lists or *generator expressions*:  
`dict((x, x*x) for x in range(0,5))`



# Java to Python: Object-Oriented Example

```
public class Counter {  
  
    private int k = 0;  
  
    public void count () {  
        k++;  
    }  
  
    public void reset () {  
        k = 0;  
    }  
  
    public int getValue () {  
        return k;  
    }  
}
```

# Java to Python: Object-Oriented Example (Python)

```
class Counter:
```

```
    def __init__(self):
```

```
        self.k = 0
```

```
    def count(self):
```

```
        self.k += 1
```

```
    def reset(self):
```

```
        self.k = 0
```

```
    def getValue(self):
```

```
        return self.k
```

Initialization (constructor)

Instance variable k

“Self” parameter is implicit in method calls but explicitly mentioned in declaration

# Constructing Objects, Invoking Methods

- Example:

```
c = Counter()  
print c.getValue()  
c.count()  
c.count()  
c.count()  
print c.getValue()
```

# Inheritance in Python

```
class LimitCounter(Counter):  
  
    def __init__(self, limit):  
        self.k = 0  
        self.limit = limit  
  
    def count(self):  
        if self.k != self.limit:  
            self.k += 1
```

In contrast to Java, Python allows *multiple inheritance*!

# Python Modules

- Module: A file containing Python definitions and statements
  - File name is module name with suffix `.py`
  - Module name is available as global variable `__name__`
  - Statements in a module are executed when the module is imported (initialization)
- Importing a module `m`:
  - `import m`
    - Accessing a definition `f()` in `m`:  
`m.f()`
  - `from m import *`
    - Accessing a definition `f()` in `m`:  
`f()`

# Why Python in This Lecture?

Python is **not** a specific multimedia language!

We will use a simple Python-binding for a multimedia/gaming framework...

Generally, knowing Python is a good thing – to get programming tasks done easily.